



| | | | | | | | | |
|--------------|--|---|---|---------------------|---------------------|--|------------------------------|----------------------------|
| PART NUMBER | ITEM ① BODY | ITEM ② REAR BODY | ITEM ③ CONTACT | ITEM ④ INSULATOR | ITEM ⑤ INSULATOR | ITEM ⑥ CRIMP SLEEVE | ITEM ⑦ NUT | ITEM ⑧ LOCKWASHER |
| 134-D307-406 | ZINC NICKEL PL .00015 MIN OVER COPPER PL .0005 MIN | BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN | BERYLLIUM COPPER GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN | TEFLON | TEFLON | COPPER NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN | BRASS NICKEL PL .0001 MIN | STEEL ZINC PL .0001 MIN |

| | |
|--|------------------------------|
| DRAWING NO. | |
| C - 134-0307-401/410 | |
| 0 REVISIONS | |
| ENGINEERING RELEASE | |
| I | 8-8-95 R H B R B B ECN 43591 |
| VERSION UPDATE | |
| * REVISION NUMBER FOLLOWED BY AN ALPHA * | |
| * CHARACTER INDICATES DRAWING CHANGE * | |
| * CATION OR PART NUMBER ADDITION ONLY * | |
| 1a | 2-6-98 R H B B ECN 45200 |

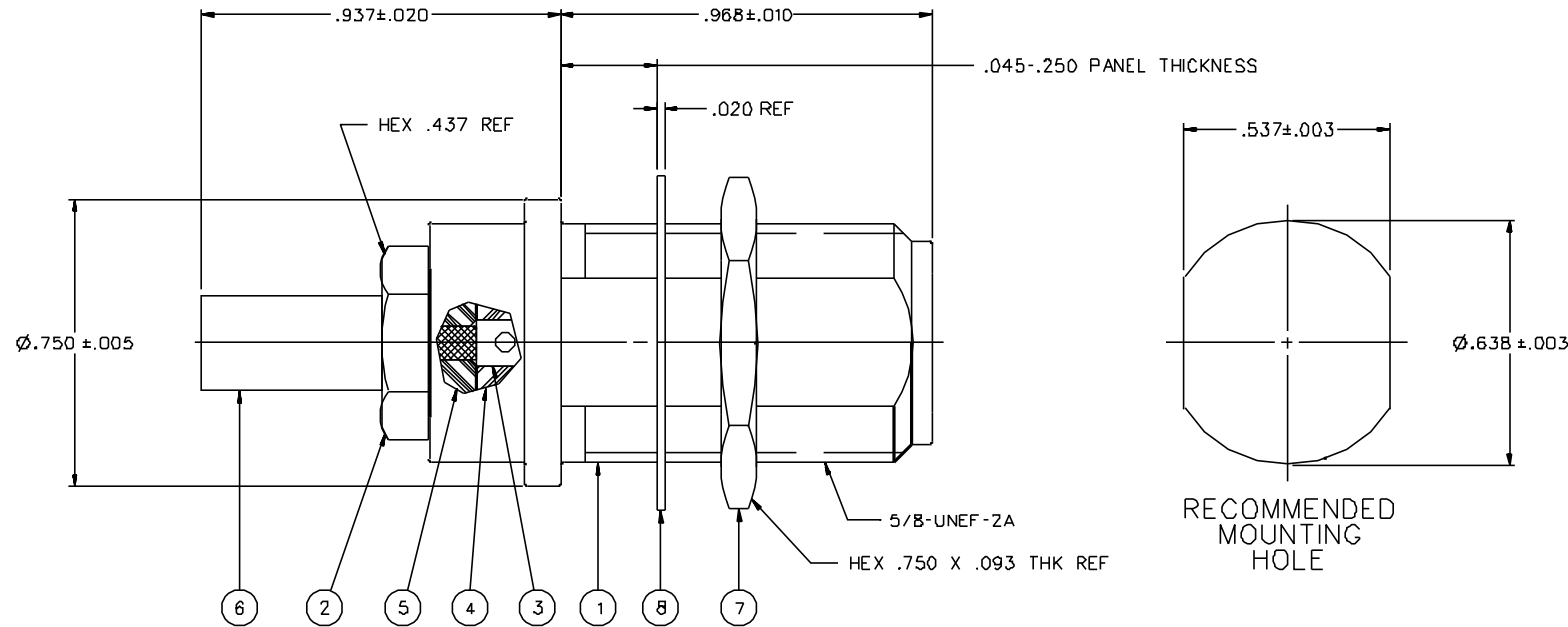

CABLE STRIP DIMENSIONS

NOTES:

1. SPECIFICATIONS:

1.1 MECHANICAL

1.1.1 CABLE ACCEPTABILITY: RG 58, RG 141, RG 303

1.2 ELECTRICAL

1.2.1 IMPEDANCE: 50 OHMS NOMINAL
 1.2.2 DIELECTRIC WITHSTANDING VOLTAGE: 2500 VRMS FOR ONE MINUTE
 1.2.3 WORKING VOLTAGE: 1000 VRMS
 1.2.4 FREQUENCY RANGE: 0-11 GHz

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED
PER ANS Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

| | | | | |
|--------------------------------------|----|--------------|---------|---|
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | DRAWN BY | DATE | Cinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Wadena, MN 56603 1-800-247-8256 |
| .XX | mm | JRK | 6-21-95 | |
| .XXX | | CHECKED BY | DATE | TITLE JACK ASSEMBLY, STRAIGHT CABLED BULKHEAD, TYPE 'N', RG 58 |
| NATL | | JRK | 8-14-95 | |
| FINSH | | APPROVED BY | DATE | CODE NO. DRAWING NO. C - 134-0307-401/410 |
| | | TAK | 8-15-95 | |
| | | APPROVED BY | DATE | SCALE 4:1 U/N INCH SHEET 2 OF 2 |
| | | RJB | 8-16-95 | |
| | | RELEASE DATE | 8-18-95 | |