




UNIT:mm

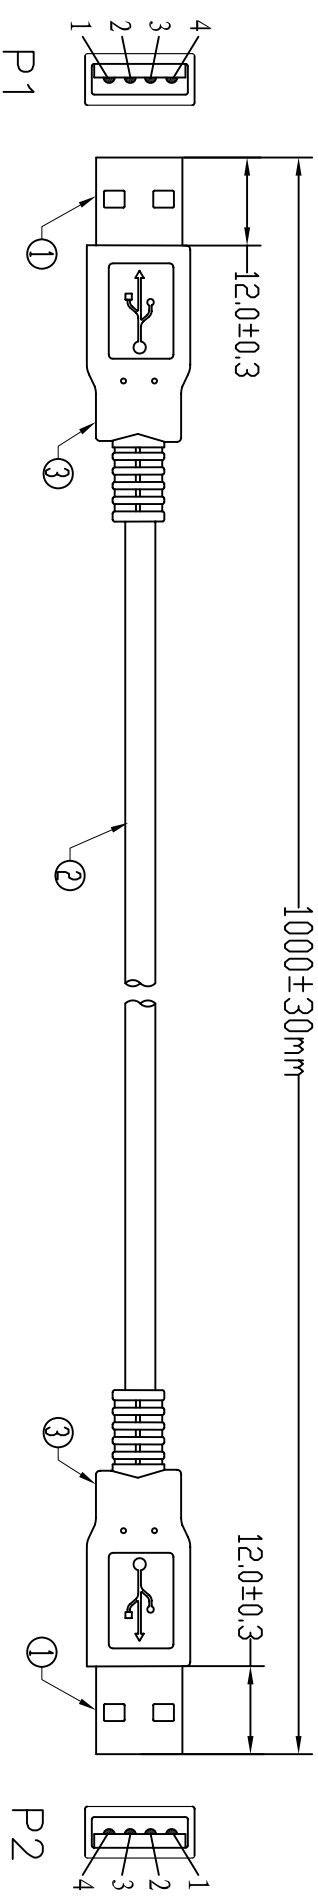

CABLE BLACK PRINT
 USB CABLE E189529 **PA** AWM 2725 28AWG/1PR AND
 24AWG/2C 80°C 30V VW-1

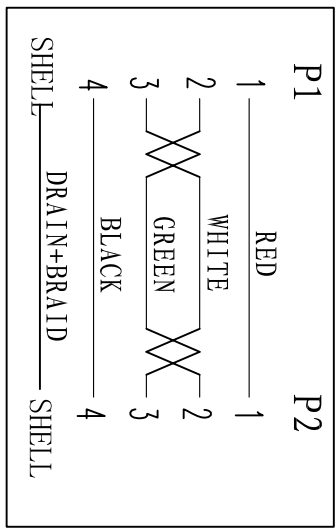

Electrical test:
 1. 100% short open miswire test
 2. Conduct resistance: 2 Ohm(max)
 3. Insulation resistance: 5Mohm(min)
 4. dielectric test: DC 300V

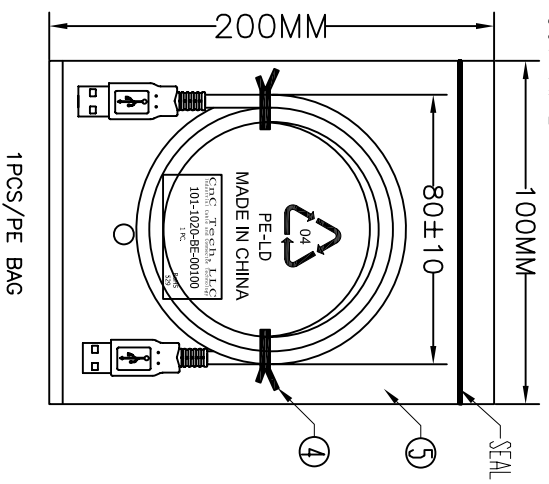

⑥	PE BAG	1/10	CLEAR SIZE:230*300*0.05mm	PRINT BLACK"MADE IN CHINA"+ "10PCS"
⑤	PE BAG	1	CLEAR SIZE:100*200*0.05mm	PRINT BLACK"MADE IN CHINA"+ "1PC"
④	TIE	2	WHITE L=80mm	
③	OUT JACKET	12g	BELGE (1V-29#)	PVC-40P (MOULD NO:MM-40)
②	CABLE	1	BELGE(1V-29#)	USB1.1 UL2725 28#/1P+26#/2C+4EB OD:4.7mm L=1000+10/-0MM
①	CONN	2set	USB A MALE SHELL-NICKEL	PIN G/F INSULATION COLOR WHITE 4PCS TYPE
NO.	NAME	Q'TY	SPECIFICATION	

CNC Tech, LLC
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1020-BE-00100
DECIDED		DATE	2012-02-14
VERSIONS/EDITED	A/0	PROJECTION	

4 3 2 1